SVANGE 4242L LED Medicine Cabinet - Specification Sheet www.kruggus



Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 5000K
- 4100 Lumens
- CRI 90+
- Integrated Defogger

Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount
- (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 55W
- Electric Current: 0.45A
- Wattage: 55W

Model

- SVANGE 4242L Left Swinging Door
- Included models in this configuration: Cabinet 1=2442L Cabinet 2=1842R

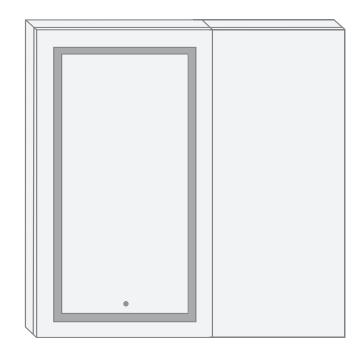


Electrical System

- Perfomance Requirments: Contains the required
- Supervisory Circiut with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency:60Hz
- Front Receptacle Current: 102-132Vac Nominal 15A
- USB Output Current:5VDC Nominal 4A




CABINET CONFIGURATION

 Included models in this configuration: Cabinet 1 = 2442L Cabinet 2=1842R






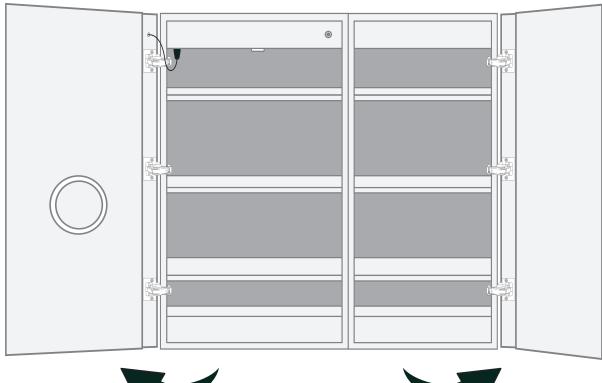

SVANGE 4242L LED Medicine Cabinet - Specification Sheet www.kruggusa.com




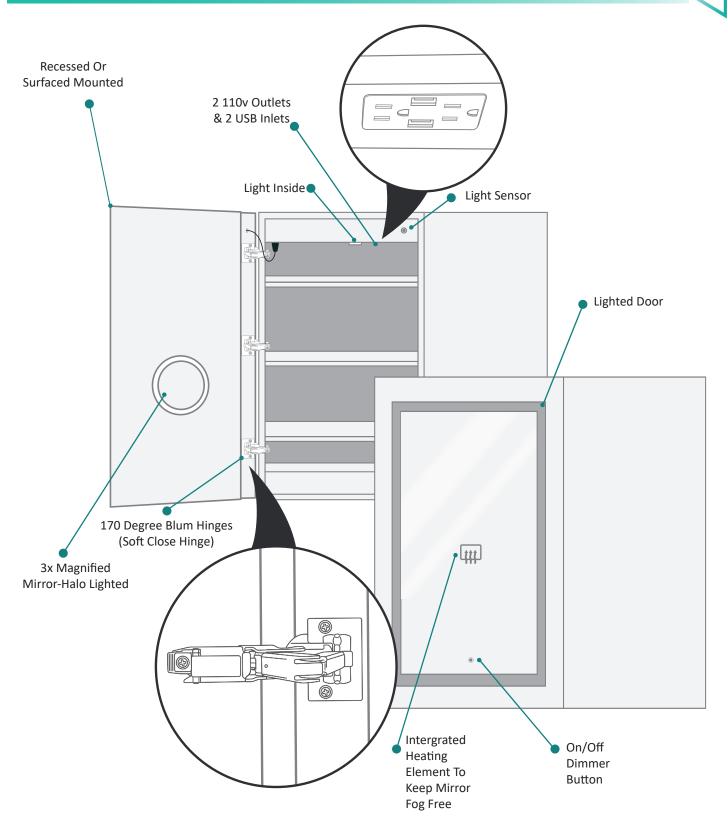

SVANGE 4242L LED Medicine Cabinet - Specification Sheet www.kruggusa.com




SURFACE MOUNT

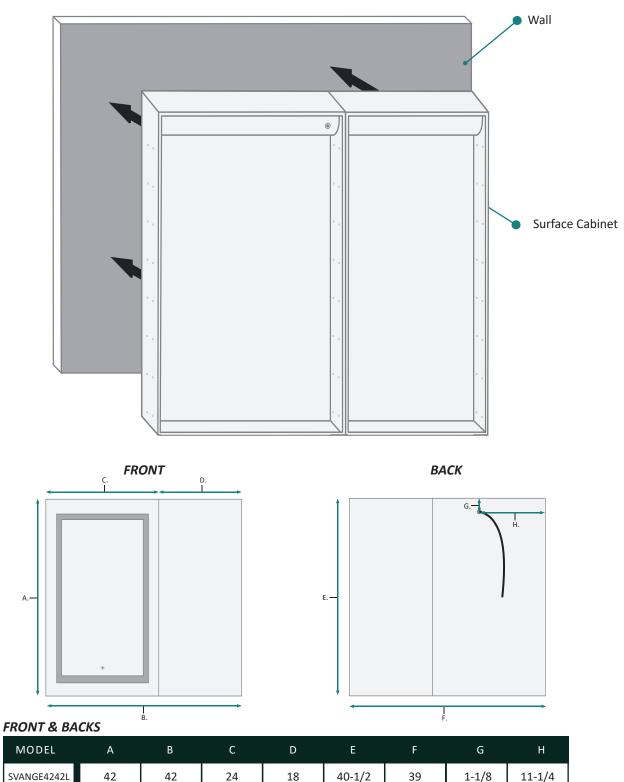

SVANGE 4242L LED Medicine Cabinet - Specification Sheet www.kruggusa.com




RECESSED MOUNT

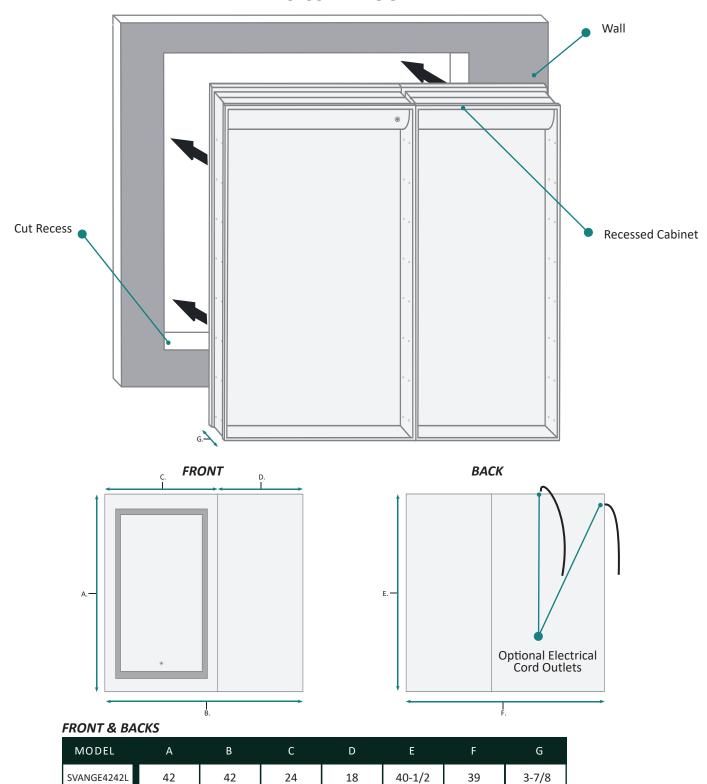



RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

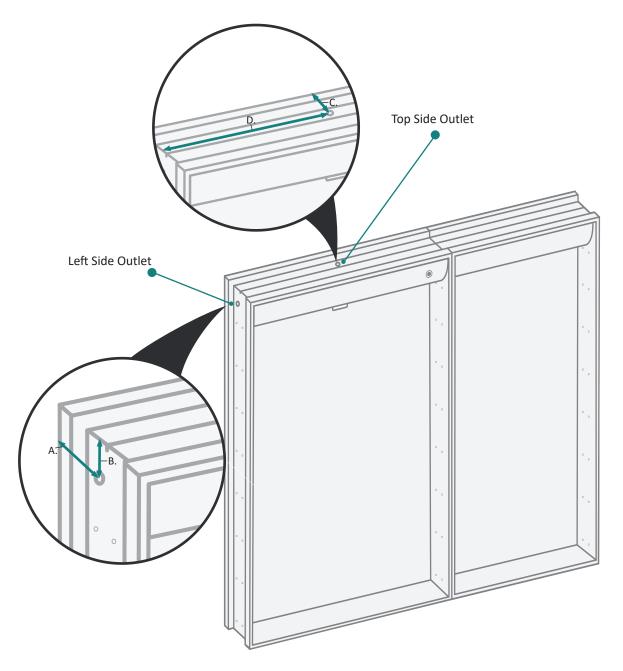



ELECTRICAL CORD LOCATIONS

MODEL	А	В	С	D	
SVANGE4242L	1-1/2	1-1/8	1-3/8	11-1/4	

SVANGE 4242L LED Medicine Cabinet - Specification Sheet Www.kruggusa.com








DOOR & CABINET

MODEL	А	В	С	D	Е	F	G
SVANGE4242L	7/8	3-7/8	4-3/4	18	3/8	5-1/4	11-1/4

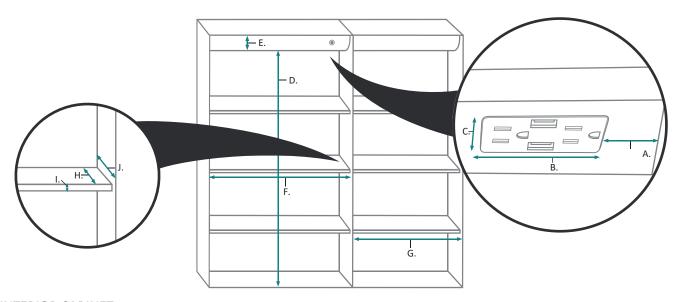

INTERIOR CABINET

MODEL	А	В	С	D	Е	F	G	н	1	J
SVANGE4242L	3-3/4	5-5/8	1-1/4	38-1/4	2-1/4	22-1/2	16-1/2	2-3/8	3/8	3-5/8