

ALTAIR
FASHION BATHROOM LIFE


Installation Manual for LED Bathroom Mirror

(Suitable for the touch switch products installation by hanging bar or hardy hold)

749028-LED-BT


Notes: to ensure the normal use of products, it is required set out wires as per the regulations of IEE at the installation places. The products are only applicable to be installed on the indoor. The installation must be executed by a professional electrician, wrong installation may lead to product damage and personal injury.

Exploded view

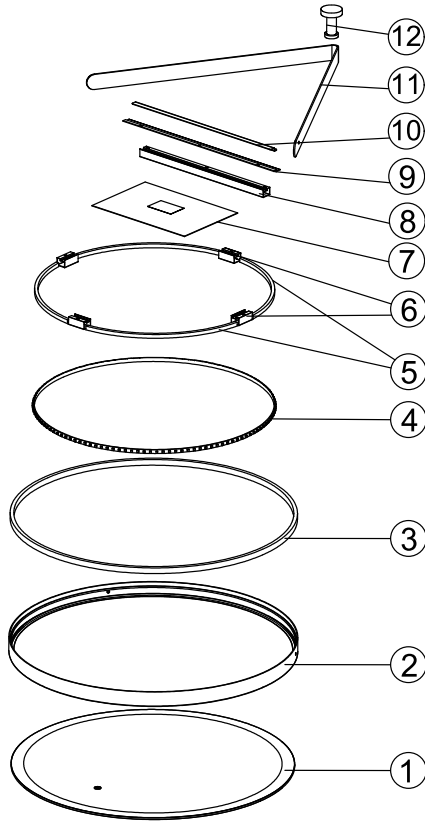


Part Description


1	Mirror
2	Aluminum Frame
3	EVA
4	LED strip
5	Foam Board
6	Aluminum Frame
7	Defogger
8	Aluminum Frame
9	Hanging Bracket
10	Hanging Bracket
11	PU Belt
12	Belt Hook

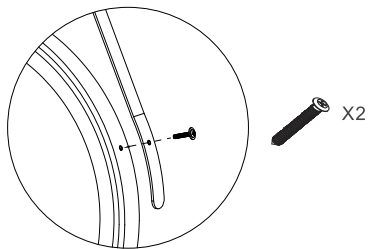


- ① Fix the belt with screws in the screw holes on both sides of the mirror frame (as shown in the picture)

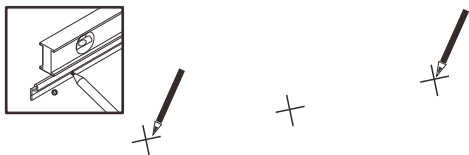


- ② Horizontal the hanging bar mark with a pen in the hanging bar hole

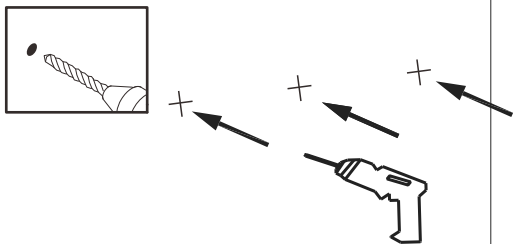


- ③ To use the drill to have the holes

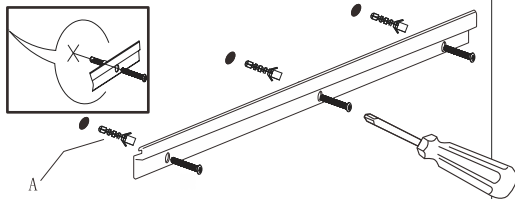


- ④ (A just apply to the solid wall)
Put the expansion plug into the wall hole both the wall holes and the hanging bar holes are match. to use the screwdriver to make the screw tightly

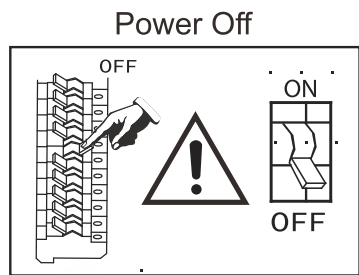


- ⑤ Please cut off all the power before the connection

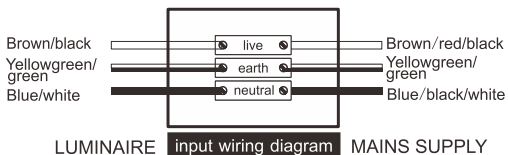


- ⑥ To connect as above photo

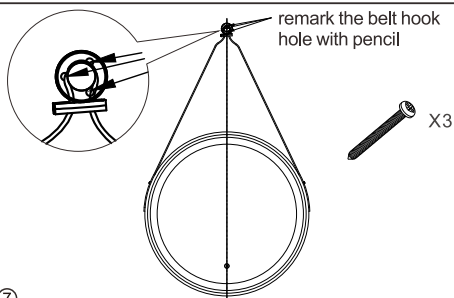

- ⑦ Hang well the mirror, straighten the belt, mark the hook hole of the belt with a pencil, and then punch the hole and fix well the base on the wall

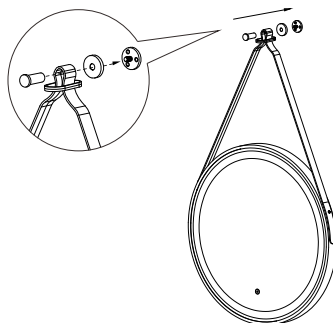


- ⑧ install hook fitting and the belt(as see picture)

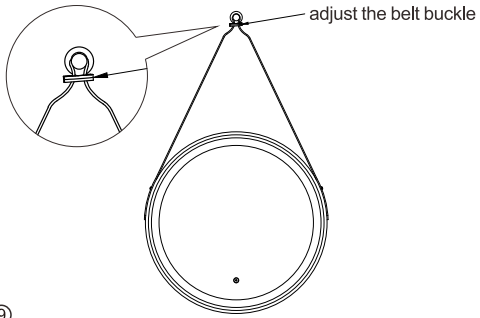

adjust the belt buckle

⑨

adjust the belt buckle(as see picture)

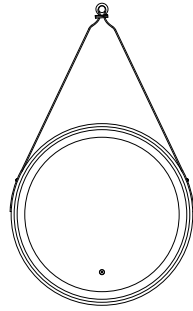

⑩

test the functions

Function usage



“Switch ” sign


Follow below instructions to operate the mirror light:

1. Single TOUCH to turn ON light and activate anti-fog function.
2. Single TOUCH to select the LED temperature (3000K, 4000K or 6000K).
3. HOLD button to begin the dimming function. Release when the desire setting is achieved.
4. Single TOUCH to turn OFF.


parts list




M4 screw



D6 expansion screw



Hook



The screw for the belt




M4 screw




The belt


Installation tools (as shown below)




Flexible rule




Leveling instrument



Churn drill



Screwdriver



Hammer

Warm tips:

1. Please do not use, if the product has any broken.
2. During operation, never put hard and sharp materials directly against the mirror surface. Otherwise, it may result in current leakage and even personal injury accident.
3. Never forget to turn off the power switch in storm days. Otherwise, lightning may damage electric elements of the product.
4. During normal operation, never forcibly pull out the power plug to stop the product. Otherwise, electric elements of the product may be damaged.
5. Please pull out the power plug if the product is not used for a long time.
6. In case of functional failure of the product, users are not allowed to disassemble and repair without authorization, otherwise, our company will not be responsible for any safety accidents.